

Innovative Upright Scrubber Dryer





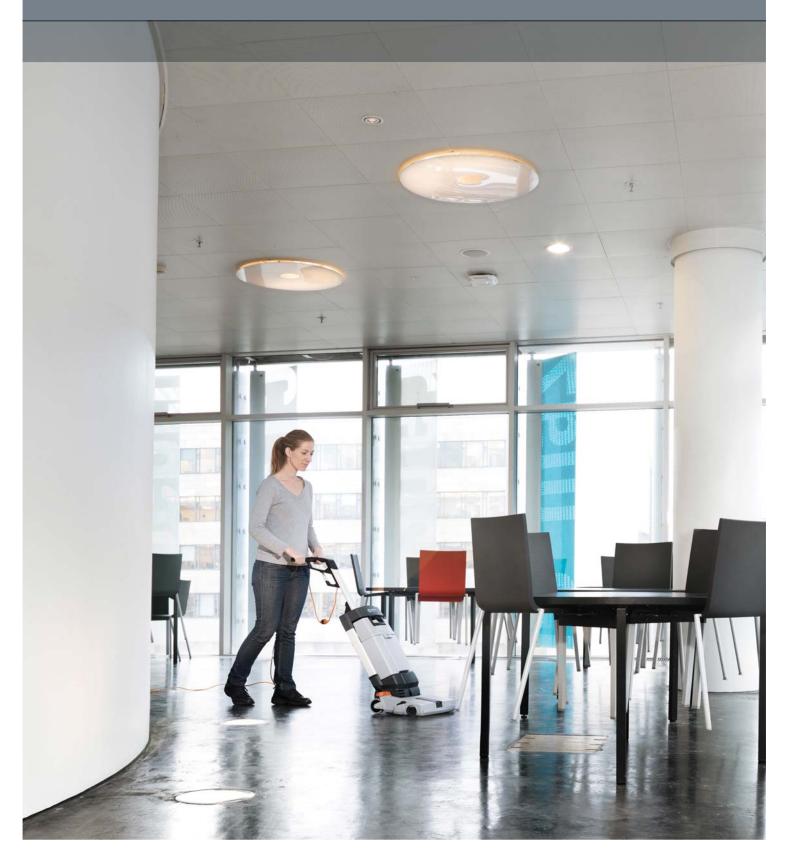

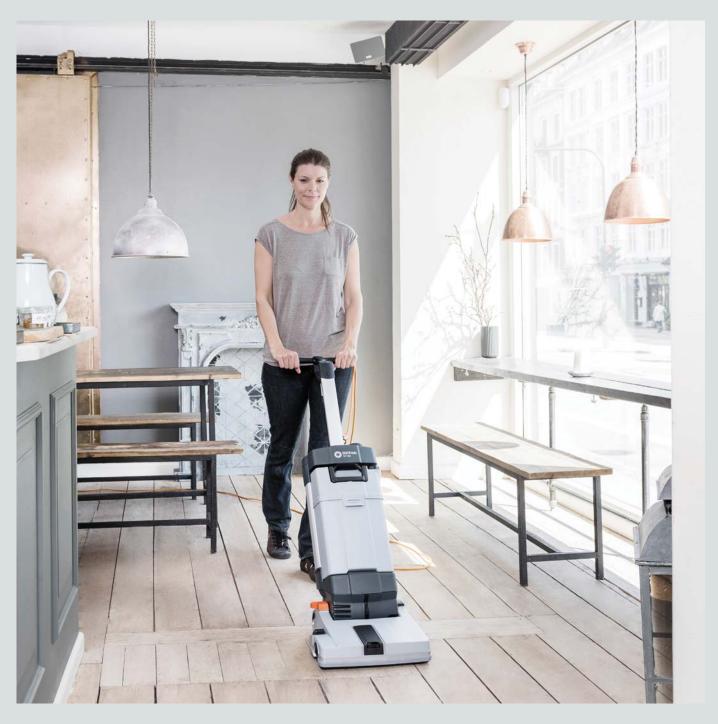

Easy to fill the solution tank with water in any low sink.



The SC100 needs just 25 cm clearance for cleaning.



Apart from faster cleaning of hard floors, you can also freshen up smaller carpets, including removal of spots, by adding an optional carpet kit. Brush and squeegees can be removed without any tools, making daily maintance operations easy and fast.

Compact upright scrubber dryer for narrow areas

The Nilfisk SC100 upright scrubber dryer is designed for cleaning narrow areas. Compared to the manual solution of a mop and bucket, this innovative upright machine scrubs and drys in one pass, giving fast access to cleaned areas.

Ideal for retail, restaurants, convenience stores, fast food outlets, hotels and in-home cleaning.

EASY, FAST AND PRODUCTIVE CLEANING

- · Scrubs and drys in one pass giving fast access to cleaned areas.
- \cdot Two solution flow settings for efficient cleaning and red LED light indicator alarm when the tank is empty
- · Ergonomic handle for comfortable one or two handed operation.
- · Easy to carry and to transport only 12 kg weight.

SAFE AND HYGIENIC

- · Only uses clean solution: eliminates dirt and bacteria spread caused by mopping or sweeping.
- · Tank-in-tank design for easy empty/refill in any low sink.
- · Low deck profile and offset for cleaning of difficult to reach areas.
- · Easy and quick maintenance operations ensure the operator always has a clean and functional machine.

REDUCED TOTAL COST TO CLEAN

- · Flexible cleaning: Solution eco-flow for light cleaning and double-flow for spot or heavy duty cleaning.
- · All machine functions stop in upright position eliminating solution spill and protecting floors.
- · Robust aluminum frame design guarantees high reliability and long life.
- · Handy detergent dosing cap sits conveniently on the solution tank so operators can always add the correct amount of detergent.



Tanks can be removed quickly and carried in one hand.



The optional manual suction hose is ideal for cleaning any hard to reach area or spot cleaning.



Stay in full control of the scrubber dryer thanks to the intuitive touch display with two water settings and a solution indicator, alerting you when the tank is empty.



Reliability is also our mantra when it comes to service

Regular service and maintenance reduce long-term maintenance costs, prolong the working life of your machinery and help provide a safe working environment for your operators and employees. At Nilfisk, we offer comprehensive maintenance services for all of our products.

The ergonomic handle can be tilted down for effective cleaning in low positions. The detachable cord is easily stored on the handle book

Squeegees can be raised for double scrubbing performance to remove any persistent dirt or spots.

The detachable tanks are easy to empty/refill in any low sink.

Offset brush enables cleaning near walls.



Touch display for intuitive control of the machine and Low water alert prevents using the machine without solution.

Water flow control with two settings secures perfect cleaning results even in filthy areas.

> When the machine is parked upright all functions will automatically stop and no squeegee or brush will be on the floor.

Both vacuum motor filter and solution filters protect sensitive components from failures and ensure a reliable cleaning machine.

Technical specifications

Description	Unit	SC100	SC100 Full package
Input	Volts	240	240
Rated power	Watts	800	800
Sound pressure level	dB(A)	72	72
Productivity rate theoretical/ actual	m²/h	620/310	620/310
Scrubbing width	mm	310	310
Solution/recovery tank	L	3/4	3/4
Brush speed	rpm	2100	2100
Length x width x height	cm	40x36x115	40x36x115
Weight (machine only)	kg	12	12
Operating weight	kg	15	15
FEATURES:			
10m detachable cord		•	•
Out of solution LED indicator		•	•
Two solution level		•	•
Tank in tank solution		•	•
Two hands working handle		•	•
Manual suction hose		0	•
Carpet kit including brush and squeegee		0	•
Delivered ready to use		•	•



- = Standard feature
- o= Optional feature

